



Product data sheet. Krypton.

Linde HiQ® specialty gases portfolio

Specifications

Component	Chemical formula	Unit	HiQ krypton 4.0	Scientific krypton 5.0
Krypton	Ar	%	≥ 99,99	≥ 99,999
Water	H ₂ O	ppm	≤ 5	≤ 5
Oxygen	O ₂	ppm	≤ 10	≤ 0,5
Total hydrocarbons	C _n H _m	ppm	≤ 5	≤ 0,5
Xenon	Xe	ppm		≤ 2
Argon	Ar	ppm		≤ 5
Nitrogen	N ₂	ppm	≤ 30	≤ 2
Hydrogen	H ₂	ppm		≤ 1


Material no.

Cylinder size	HiQ krypton 4.0	Scientific krypton 5.0
2 litres	—	113167
10 litres	117262	100824
50 litres	—	104402

Features

Valve outlet: DIN 477 No. 10

Cylinder colour: Light green/Silver grey

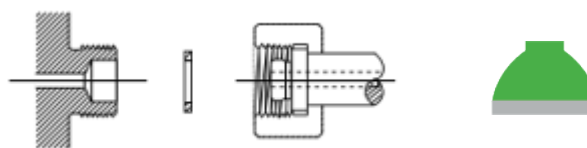

Characteristics

Compressed gas, inert

Filling pressure: 200 bar

Safety

For all safety related topics including handling, transport and recommended use please see Safety Data Sheets.

Sweden: www.linde-gas.se/sakerhetsdatablad

Norway: www.linde-gas.no/sikkerhetsdatablader

Finland: www.linde-gas.fi/turvallisuusohjeet

Denmark: www.linde-gas.dk/sikkerhedsdatablade

Iceland: www.linde-gas.is/oryggisleidbeiningar

Latvia: www.linde-gas.lv/drosibas_datu_lapas

Lithuania: www.linde-gas.lt/saugos_duomenu_lapai

Estonia: www.linde-gas.ee/ohutuskaardid

Safety Data Sheets are available through your local Linde homepage in both local language and English.



Linde Northern Europe, www.linde-gas.com

® HiQ is a Linde registered trademark.